


# Hydro-Pro 150<sup>®</sup> QC Quick Connect Spray Nozzle

The **Hydro-Pro 150<sup>®</sup> QC** has a revolutionary nosepiece designed for easy ¼ turn movement to connect and disconnect special Quick Connect attachments. Can be used with or without accessories!

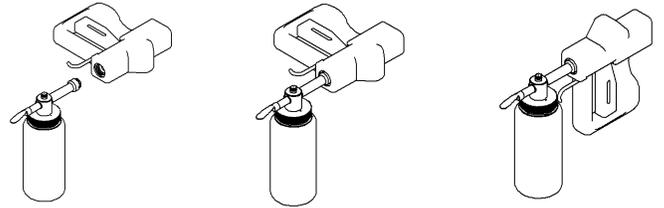

## Specifications

- ◆ **Maximum recommended operating pressure** ..... 200°F/93°C
- ◆ **Maximum working pressure**..... 150 psi
- ◆ **Flow rates:** ..... 5-7 gpm (50-80 psi);  
10 gpm maximum  
at 150 psi
- ◆ Available: black, white or red cover
- ◆ Available with or without swivel adapter

**NOTE:** Intended for water use only.  
Not suitable for steam service.



**Shown:** Black Hydro-Pro 150 with 16 oz. bottle

## Features

- ◆ Plastic 16 oz. bottle or 2 gallon container for safe, convenient, targeted applications of soaps and disinfectants
- ◆ 6," 24" and 36" stainless steel extension wand for concentrated directional spray
- ◆ Stainless steel deflector tip on container attachments ensures spray direction
- ◆ Operating temperature, pressure and flow rates are the same as the original Hydro-Pro spray nozzle



**USA Headquarters**

2801 Baglyos Circle ♦ Bethlehem, PA 18020

Phone: (484) 893-5080 ♦ Fax: (484) 893-5099 ♦ Toll Free: (877) STRAHMAN

[www.strahmanvalves.com](http://www.strahmanvalves.com)

### France

Savoie Hexapole, F-73420 Mery, France

Tel: 33 (0) 4 79 35 78 00

Fax: 33 (0) 4 79 35 78 20

### Germany

Kirchstrasse 16, D-77855, Achern, Germany

Tel: 49 (0) 7841-6846530

Fax: 49 (0) 7841-6846531



ISO 9001  
QMI-SAI Global

Last Updated: July, 2012

# Hydro-Pro 150<sup>®</sup> QC Quick Connect Spray Nozzle

The **Hydro-Pro 150QC<sup>®</sup>** spray nozzle is specially designed to accept any of the Quick Connect attachments with a simple ¼ turn to connect and disconnect for safe and convenient cleaning! Same great performance as the original **Hydro-Pro 150<sup>®</sup>** Spray Nozzle.



*Shown: Red Hydro-Pro 150 with extension*

## Specifications

- ◆ **Maximum recommended operating pressure** ..... 200°F/93°C
- ◆ **Maximum working pressure**..... 150 psi
- ◆ **Flow rates:** ..... 5-7 gpm (50-80 psi);  
10 gpm maximum  
at 150 psi
- ◆ Available: black, white or red cover
- ◆ Available with or without swivel adapter

**NOTE:** Intended for water use only.  
Not suitable for steam service.

## Quick Connect Accessories

- ◆ 2 gallon soap reservoir bottle
- ◆ 6" extension wand with 16 oz. bottle
- ◆ 6" extension wand with interchangeable heads (adjustable and chisel type)
- ◆ 24" extension wand, straight flow only
- ◆ 36" extension wand with interchangeable heads (adjustable and chisel type)



*Shown: 2 gallon container attachment*



### USA Headquarters

2801 Baglyos Circle ♦ Bethlehem, PA 18020

Phone: (484) 893-5080 ♦ Fax: (484) 893-5099 ♦ Toll Free: (877) STRAHMAN

[www.strahmanvalves.com](http://www.strahmanvalves.com)

### France

Savoie Hexapole, F-73420 Mery, France

Tel: 33 (0) 4 79 35 78 00

Fax: 33 (0) 4 79 35 78 20

### Germany

Kirchstrasse 16, D-77855, Achern, Germany

Tel: 49 (0) 7841-6846530

Fax: 49 (0) 7841-6846531