



M-70, S-70, S-80, F-90 Heavy Duty Water Saver Spray Nozzles

Strahman nozzles are often touted as being the best on the market. Designed and built to withstand the most rugged applications, the operator can achieve any type of water stream needed for the job simply by applying pressure on the lever arm—from a soft spray to a strong, steady stream. This provides a convenient control that immediately shuts-off the water when the lever arm is released. The long rubber grip feels comfortable in the hand and the mechanical ease of the trigger spray assures a better cleaning with a lot less effort and less hand fatigue.

- M-70 features an adjustable spray
- S-70 features an adjustable spray
- S-80 features a strong, steady spray
- F-90 features a fine, soft spray

KEY FEATURES

- **Durable Construction:** All bronze construction and sand-cast bodies with stainless steel seats are non-corrosive and designed to prevent leaks
- **Ergonomically Designed:** Comfort grip helps to reduce operator fatigue and can be further enhanced with our Swivel Adapters
- **Premium Materials:** All components are built to ASTM standards, ensuring durability and long-term reliability
- **Replaceable Cover:** Heavy-duty, durable rubber cover insulates the user from heat while protecting the nozzle, available in colors Black, Red, White, and Blue.



M-70
Bronze



s-70
Stainless Steel



s-80
Bronze



s-80
Stainless Steel



F-90
Bronze




F-90
Stainless Steel

NOZZLE FLOW TEST		
WATER PRESSURE PSI	FLOW (GPM)	
	STANDARD NOZZLE	LOW FLOW NOZZLE
20	3 ¼	2 ¼
30	4 ¼	2 ¾
40	5 ½	3 ¼
50	5 ¾	3 ¾
60	6 ¾	4 ½
70	7 ½	4 ½
80	7 ¾	4 ¾
90	8 ¼	5
100	9	5 ½

Maximum water temperature: 200°F (93°C)
Maximum working pressure: 150PSI

Note: Not suitable for steam service

M-70, S-70, S-80, F-90 HEAVY DUTY WATER SPRAY NOZZLES

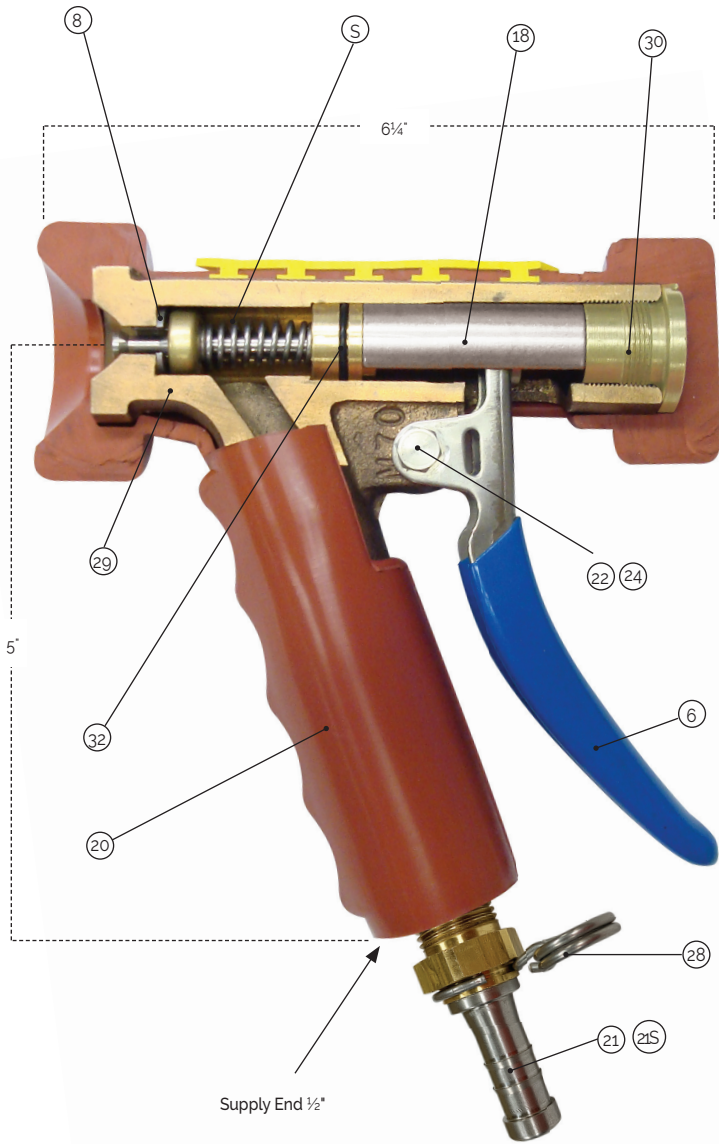

DIMENSIONS: 6¼" W X 5" H
WEIGHT: 2¾ LBS. (W/O ADAPTER)



RUBBER COVER - BLACK



RUBBER COVER - RED



RUBBER COVER - WHITE



RUBBER COVER - BLUE

PART NO.	DESCRIPTION	FOR BRONZE ORDER NO. (MATERIAL)	FOR STAINLESS STEEL ORDER NO. (MATERIAL)
MAIN BODY PARTS LIST			
8	SEAT	WSSEAT (SS 303)	WSSEAT (SS 303)
	SEAT FOR LOW FLOW	WSSEATLF (SS 303)	WSSEATLF (SS 303)
18	NOZZLE CAGE (SET OF 6)	WSCASS (SS 304)	WSCASS (SS 304)
30	LOCK SCREW	LSCRBR (BR C3600)	LSCRSS (SS 303)
22	LEVER ARM BUSHING	LARMBU (NYLON)	LARMBU (NYLON)
24	LEVER ARM SCREW	WLSLSCR (SS 303)	WLSLSCR (SS 303)
	LEVER ARM NUT	WLSLNU (SS 303)	WLSLNU (SS 303)
6	LEVER ARM - BLUE	WLSLARMBLUE (SS 304)	WLSLARMBLUE (SS 304)
29	MAIN BODY	WSM70BODY0005 (BRASS C83600)	S70BDBUSEATSS (SST 304)
20	NOZZLE COVER - BLACK	M70COVRBLACK	M70COVRBLACK
	NOZZLE COVER - RED	M77COVRRED	M77COVRRED
	NOZZLE COVER - WHITE	M75WCOVR	M75WCOVR
	NOZZLE COVER - BLUE	M70COVRBLUE	M70COVRBLUE
ADAPTER PARTS			
21S	¾" FGHT SWIVEL HOSE	G075BR (BR36000)	SG0075SS (SS 303)
	½" BARB SWIVEL ADAPTER	SWADAP0500BR (BR36000)	SWADAP0500SS (SS 303)
	⅝" BARB SWIVEL ADAPTER	SWADADAP0063BR (BR36000)	SWADADAP0063SS (SS 303)
	¾" BARB SWIVEL ADAPTER	SWIVADAP0075BR (BR36000)	SWIVADAP0075SS (SS 303)
28	LOCK RING	WLSLRNG (SS302)	WLSLRNG (SS302)
21	¾" FGHT RIGID ADAPTER	WSADAPTERCOMPLETE0003 (BR36000)	G050SS (SS 303)
	½" BARB RIGID ADAPTER	BARB0050BR (BR36000)	
	⅝" BARB RIGID ADAPTER	BARB0063BR (BR36000)	BARB0063SS (SS 303)
	¾" BARB RIGID ADAPTER	BARB0075BR (BR36000)	BARB0075SS (SS 303)
REPLACEABLE CARTRIDGE UNIT			
S	REPLACEABLE CARTRIDGE	M70CARTBR (BR & SSTL)	S70CART (SSTL)
31	STEM GUIDE (INSTALLED WITH CARTRIDGE)	WSSGUIDBR (BR & SSTL)	WSSGUISS (SSTL)
32	BODY SEALING O RING (INSTALLED W/CARTR.)	ORNG018EA	ORNG018EA

Maximum water temperature: 200°F (93°C)

Maximum working pressure: 150PSI

Note: Not suitable for steam service