



# WASHDOWN HOSES

## PREMIUM AND EXTRUDED WRAPPED HOSES

Strahman washdown hoses are engineered for demanding, heavy-duty industrial and food processing environments. Manufactured from FDA-compliant materials, they are safe for direct contact with dairy, oils, and fatty foods – making them ideal for a wide range of sanitary and industrial applications.


Available add-on options include:

- Swivel Adapters
- Ball Stop
- Internal Spring Assembly
- Bronze or Stainless Fittings



Shown ▲  
Premium Wrapped  
Hoses

Shown ▶  
Premium Wrapped in Red, White,  
and Black, and  
Extruded Hose in Yellow

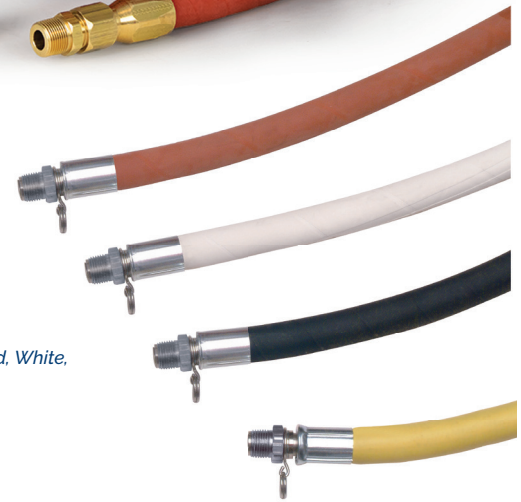

### KEY FEATURES

- **Food Safe Assurance:** Non-toxic liner complies with FDC CFR Title 21, Section 177.2600 for fatty foods and is certified under IANESCO Certification.
- **Durable Construction:** Choice of bronze or stainless steel end fittings and comes standard with a 360° swivel adapter for ease of use. An optional Internal Spring Assembly is available to enhance durability in rugged conditions.
- **Customizable Lengths:** Available in standard lengths of 25', 50', 75', and 100', with custom lengths anywhere in between available upon request to suit your specific needs.

**Please note:**

Strahman hoses are not rated for steam service.

SPECIFICATIONS		
FEATURE	PREMIUM HOSE	EXTRUDED HOSE
Construction	Braided high-pressure hose	Lightweight extruded hose
Material	Nitrile Butadiene Rubber (NBR)	Nitrile Butadiene Rubber (NBR)
Durability	Superior abrasion and tear resistance—virtually indestructible	Excellent abrasion and tear resistance
Flexibility	Sturdy with anti-kink braiding	Lightweight and highly flexible
Chemical Resistance	Resists oils and fatty foods	Resists oils, fatty and lactic acids
Temperature Rating	-22° F to 200° F (-29°C - 93°C)	-20° F to 200° F (-29°C - 93°C)
Max Working Pressure	300 PSI (150 PSI with a mixing hose station)	300 PSI (150 PSI with a mixing hose station)
Color Options	Red, White, Black	Yellow, White, Black